

Product Datasheet model uvex super OTG 9169 164

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics


- classic overspecs for prescription spectacle wearers with a flat lens for a wide field of vision, designed for maximum wearer acceptance
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- with uvex CBR65 lens technology:
 - **Contrast** – Contrast enhancement
 - **Blue light reduction** – of 50% at 450 nm, filtering HEV blue light (high-energy visible light)
 - **Relaxed vision**
 - **65** – 65% transmission
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm

2. Technical Details Body**Front piece**

Material	PC+PBT
Colour	black

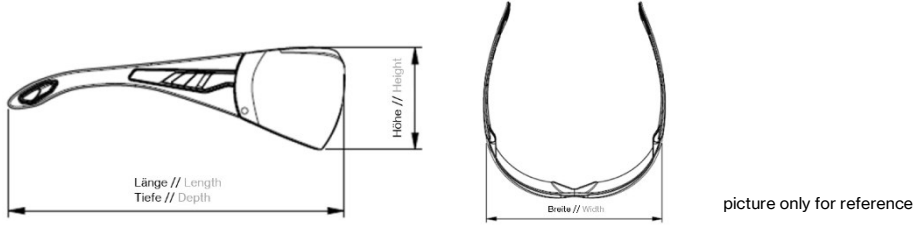
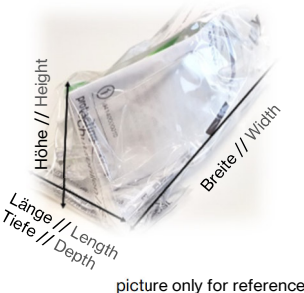
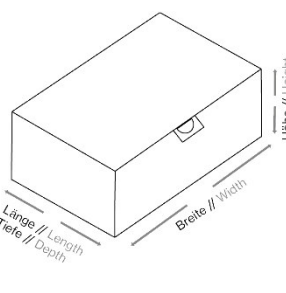
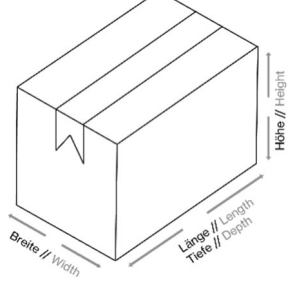
Rivet	
Material	brass, nickel-plated
Temple	
Material	PC+PBT/TPE
Colour	black, clear
Marking	
Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens

Material	PC
Thickness	2.1 mm at PD
Coating	uvex supravision excellence
Tint	CBR65
Features tint	blue light reduction of 50% at 450 nm, filtering HEV, contrast enhancement
UV protection	UV400
Marking according to EN	
Filter	5-1.4 (EN 172)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	39g		
Dimensions (L x W x B) in approx. mm			
	161 x 157 x 58		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4031101728551	4031101880938	4031101880945
Quantity in pcs.	1	8	128
Dimensions (L x W x H) in approx. mm			
	76 x 160 x 58	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	39	312	4,992
Gross weight in approx. g	53	530	9,380
Country of Origin	Germany		

5. Miscellaneous

Standards	EN 166+ EN 172
PPE Category	Category II