

Product Datasheet model uvex sportstyle 9193 888**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth****1. Product Characteristics**


- sporty, lightweight safety spectacle with a contoured lens that will fit narrow and wider faces equally well
- the combination of soft padding around the brow with ergonomically shaped side arms and soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, adjustable nose pad allows spectacle to be adapted to the wearer to deliver a comfortable, non-slip and pressure-free fit
- robust polycarbonate lens with uvex anti-fog coating – permanent anti-fog performance on the inside
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm

2. Technical Details Body**Front piece**

Material	PC-PBT/TPE
Features	soft, adjustable nose pad
Colour	white, black

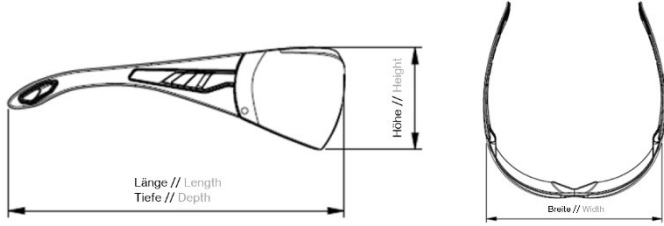
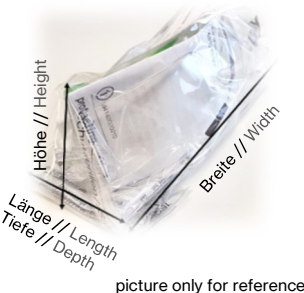
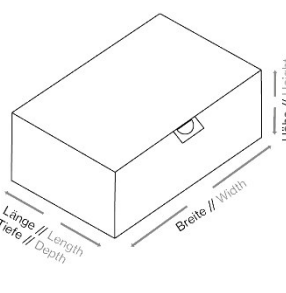
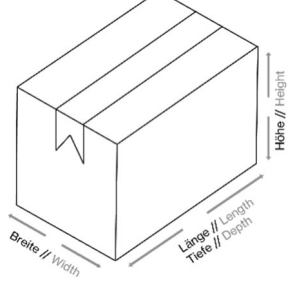
Rivet	
Material	brass, nickel-plated
Side arms	
Material	PC-PBT/TPE
Colour	white, black
Marking	
Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens

Material	PC
Thickness	2.1 mm at PD
Coating	uvex AF – anti-fog on the inside
Colour	grey, silver mirror
UV protection	UV400
Marking	
Filter	5-3.1 (EN 172)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	23g		
Dimensions (L x W x B) in approx. mm	 <p style="text-align: right;">picture only for reference</p>		
	160 x 149 x 45		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4066853032861	4066853032878	4066853032885
Quantity in pcs.	1	10	160
Dimensions (L x W x H) in approx. mm	 <p style="text-align: center;">picture only for reference</p>		
	60 x 150 x 48	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	23	230	3,680
Gross weight in approx. g	37	475	8,470
Country of Origin	Germany		

5. Miscellaneous

Standards	EN 166 + EN 172
PPE Category	Category II